



CRAWLER-MOUNTED CRUSHER

NC320GXC

PATENT
PENDING



FEATURES

- Job-proven AC3219B jaw crusher for asphalt/concrete crushing
- Efficient operation and easy maintenance
- Easy feeding from 3 directions (front and both sides)
- Powerful magnetic separator
- Automatic feeding system (remote control is optionally available)
- Foldable grizzly undersize conveyor (optional)
- Eco-friendly low noise and low vibration levels

APPLICATIONS

- Concrete / asphalt wastes, friable rocks, etc.
- Demolition sites, civil work sites
- Recycling plants, etc.



NAKAYAMA IRON WORKS, LTD.



NC320GXC

CRAWLER-MOUNTED CRUSHER




**SUBSTANTIAL SYSTEM
AND EASY MAINTENANCE**

- **OVERLOAD PROTECTION WITH WARNING LIGHT**
Automatic crusher/feeder stop in case of overload or abnormal operating conditions. Warning light turns on.
- **MORE POWER DISTRIBUTION TO CRUSHER**
More power to crusher for peak load
- **HYDRAULIC POWER TAKEOFF FOR OPTIONAL EQUIPMENT**
Sufficient hydraulic power supply is available for optional equipment (1 x Screen + 3 x Conveyor)
- **RE-BAR DISCHARGE**
Sufficient space above the main conveyor for easy re-bar discharge
- **ADJUSTABLE FEEDER SPEED**
Feed rate is adjustable to optimum crushing speed.
- **WATER SPRAY**
For dust suppression (water supply by the customer)

- **2-STAGE AIR CLEANER**
For protection of engine from dust
- **VARIABLE CRUSHER SPEED**
Crusher speed is adjustable to run at the optimum crushing speed depending on the feed material.
- **HYDRAULIC SETTING ADJUSTMENT**
Easy crusher discharge setting adjustment.
- **CRUSHER REVERSE ROTATION**
For crushing difficult materials and re-starting with the material between the jaws.
- **ACCESS LADDER**
Access ladders on both sides
- **LARGER STOCKPILE**
Main conveyor discharge height 2,430mm



■ DIMENSIONS

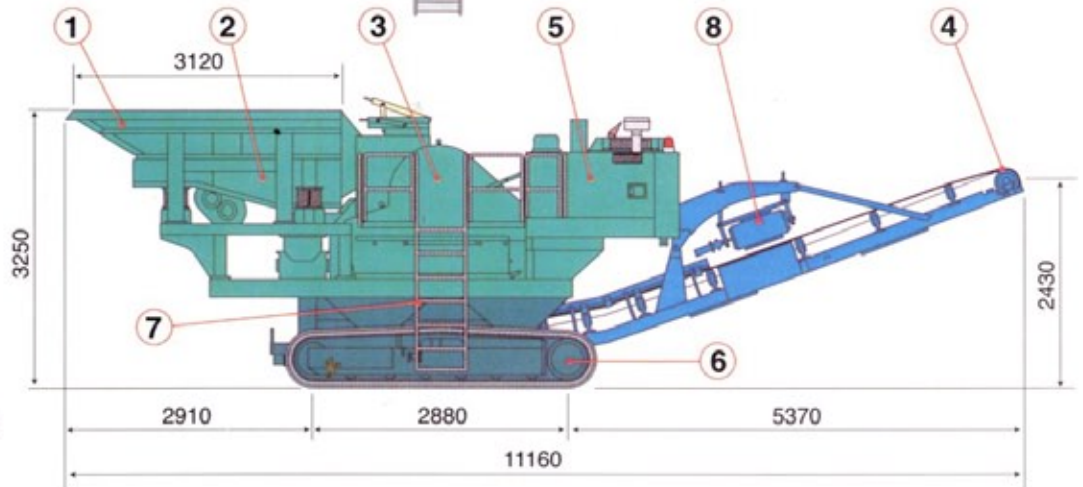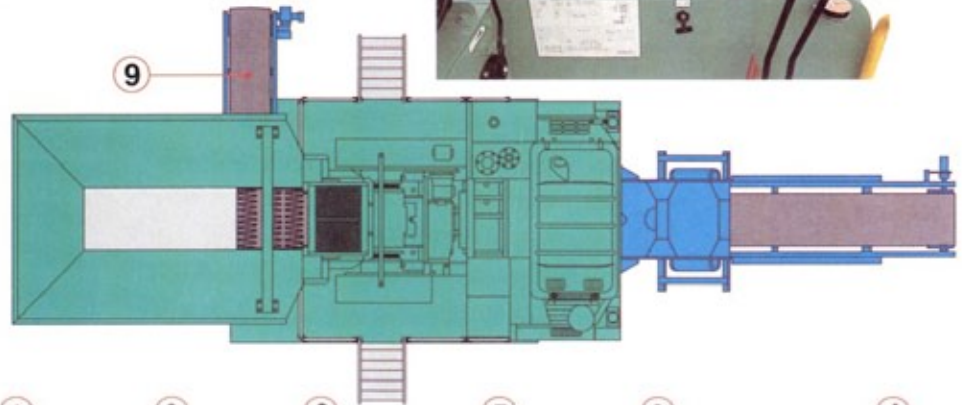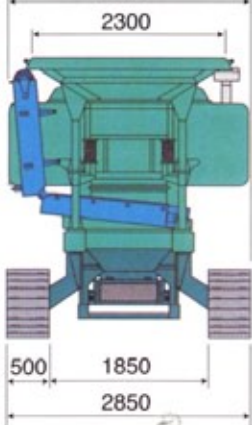

■ PART NAMES

- ① Feed hopper
- ② Grizzly vibrating feeder
- ③ Jaw Crusher
- ④ Main belt conveyor
- ⑤ Engine, hydraulic etc.
- ⑥ Undercarriage
- ⑦ Collapsible ladder
- ⑧ Magnetic separator
- ⑨ Grizzly undersize conveyor (optional)

■ SPECIFICATIONS

Model	AC Jaw Crusher		Grizzly Feeder		Capacity (t/h)	Max.Feed Size H x W x L (mm)	Engine Output (kW/min ⁻¹)	Tank Fuel/Hyd Fluid(l)	Gross Weight (t)	Drive
	Model	Feed Size(mm)	Model	Trough W x L(mm)						
NC320GXC	AC3219B	470x816	GVFH826H	800x2600	20~135	400x650x800	55/2200	99/1950	21	Hydraulic

- Capacity varies depending on the characteristic, size and gradation of the feed material.
- Asphalt crushing needs wider discharge clearance. Engine can automatically stop for protection.
- In order to keep our policy of continuous development, specifications are subject to change without notice.



Kindly refer to the operation and maintenance manual for safe use of this machine.

NAKAYAMA IRON WORKS, LTD.

2246-1 Amagu, Asahimachi, Takeo City, Saga Pref. 843-0001 JAPAN

<http://www.nakayamairon.co.jp>

TEL: (81)954-22-4171 FAX: (81)954-23-0691

E-mail Address: export@nakayamairon.co.jp

SAGA-TOKYO-OSAKA-NAGOYA-SINGAPORE

NAKAYAMA CRUSHING SERVICES (S) PTE LTD.

1B Simei street 3, #10-11 Eastpoint Green, Singapore 529890

TEL/FAX: (65) 6222-3538

E-mail address: ncss1997@mbox1.ntti.net.sg