



NAKAYAMA COAWLER MOUNTEN SCREEN MS410G MINI SCREEN



Type I



Type II

FEATURES

- Compact size
- Large production capacity
- Equipped with a newly developed heavy-duty 2-deck vibrating grizzly screen GSH4102. Also available with NSR/NRE inclined vibrating screens.
- Two types are available.
 - Type I with 1 belt feeder and 3 hydraulic folding product-conveyors
 - Type II without a belt feeder but with 2 hydraulic folding conveyors
- Adjustable feeding speed and screen rotation depending on materials
- Efficient screening operation through hydraulic driven motor.



Type I

(3-way split chute - rear view)

APPLICATIONS

- Asphalt/Concrete wastes
- Soil rehabilitation in construction and demolition sites
- In association with mobile crushing equipments

NAKAYAMA IRON WORKS, LTD.



NAKAYAMA COAWLER
MOUNTEN SCREEN

MS410G


MINI SCREEN

Mini screen with outstanding mobility capable of dry screenig and separating a wide variety of materials in the most difficult and demanding of application especially in recycling, soil remediation, aggregates production, construction and demolition sites!

Equipped with hydraulic folding conveyors to have a compact size, the Mini MOBAL screens MS410 can be easily transported on a low tonnage self-loader truck.



DIMENSIONS

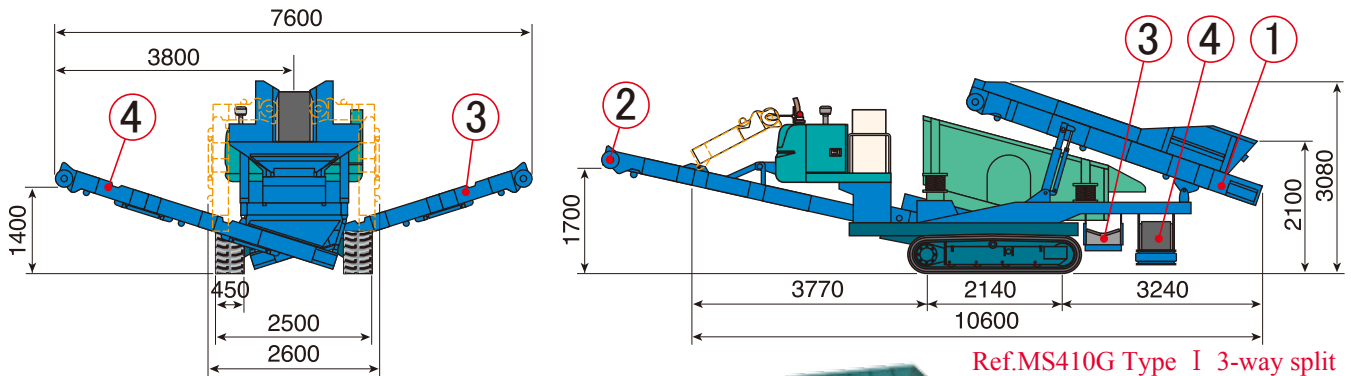

Ref.MS410G Type I 3-way split

PARTS NAMES

- ① Belt Feeder
- ② Undersize conveyor
- ③ Intermediate size Side conveyor
- ④ Oversize sideconveyor



Type II
2-way split

SPECIFICATIONS

Modal	Vibrating Grizzly Screen		Number of dacks	Inclination	Maximum feed Size (mm)	Capacity (t/h)	Engine Output (kW/min)	Tank Fuel/Hyd Fluid(ℓ)	Weight (t)
	Modal	Screen Size W×L(mm)							
MS410G	GSH4102	1200×3000	2	15°	150(200★)	10-150	40.5/2100	135/93	12(10.5★)

※ Specifications with an asterisk (★) are exclusively for Type II

- The processing performance varies depending on the feed rate as well as the characteristics, size and gradation of the feed material.
- In order to keep out policy of continuous development, specifications are subjectto change without notice



NAKAYAMA IRON WORKS, LTD.

2246-1 Amagu, Asahi-machi, Takeo City, Saga Pref., 843-0001, Japan

Tel : 0954-22-4171 Fax : 0954-23-0691 NAKAYAMA CRUSHING SERVICES(S) PLE

<http://www.nakayamairon.co.jp>

1B SIMEI STREET 3,#10-11 EASTPOINT GREEN,SINGAPORE 529890

E-mail Address: export@nakayamairon.co.jp Tel : (65)222-3538 Fax : (65)222-3538

SAGA-TOKYO-OSAKA-NAGOYA-SINGAPORE E-mail Address:ncss1997@mboxl.ntti.net.sg